



Resource Report - Aster Workshop - fictional company project

Scope: Aster Workshop Renovation All resources

RESOURCES

6

REPORT ROWS

6

PDF PRICE OFFERS

6


CUMULATIVE CUTOFF

Off

2,868.00 EUR

Resources by type

Material	2
Equipment	1
Labour	1
Service	1
Transport	1

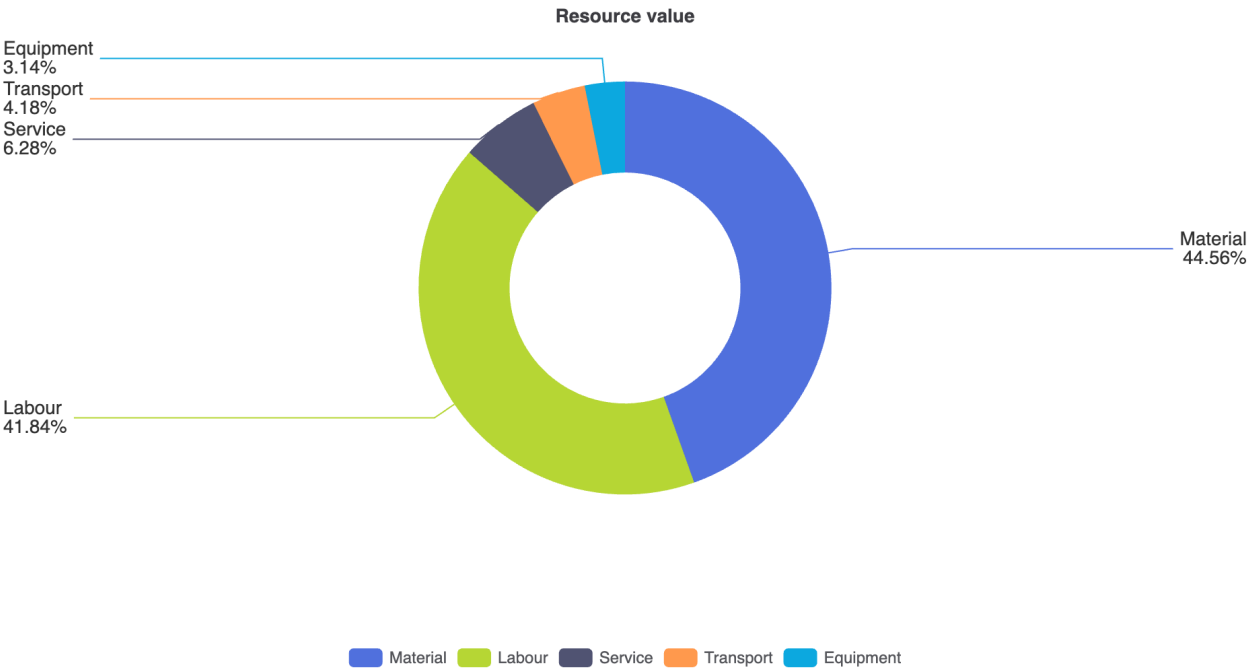

Resource Report - Aster Workshop - fictional company project

Scope: Aster Workshop Renovation All resources

All resources grouped by resource type

Code	Resource	Type	Supplier	Quantity	Unit	Unit price	Cur.	Total	Offer
Equipment									
EQP.01	Portable floor cutter (1 BOQ)	Equipment	Willow Plant (fictional)	6.00	h	15.00	EUR	90.00	PDF
Labour									
LAB.01	Finishing operative (2 BOQ)	Labour	Rowan Crew (fictional)	48.00	h	25.00	EUR	1,200.00	PDF
Material									
MAT.01	Floor panels (1 BOQ)	Material	Juniper Supply (fictional)	63.00	m2	18.00	EUR	1,134.00	PDF
MAT.02	Interior paint (1 BOQ)	Material	Juniper Supply (fictional)	24.00	l	6.00	EUR	144.00	PDF
Service									
SVC.01	Final review allowance (1 BOQ)	Service	Aster Works (fictional)	1.00	item	180.00	EUR	180.00	PDF
Transport									
TRN.01	Local delivery allocation (1 BOQ)	Transport	Willow Plant (fictional)	60.00	m2	2.00	EUR	120.00	PDF

Plant and delivery offer

Willow Plant - invented supplier

FICTIONAL TRAINING DOCUMENT - NO COMMERCIAL OR LEGAL EFFECT

DEMO / 03-EQUIPMENT-TRANSPORT-OFFER

Example date: 15 September 2026

EQUIPMENT

Portable floor cutter: 15.00 EUR/hour. Quantity factor: 0.10 h per floor m2.

TRANSPORT

Local delivery allocation: 2.00 EUR per installed floor m2. This separate line is used only because panel prices exclude transport.

PRICE CRITERIA

Date 2026-09-15. Price Set ASTER-26. Location Workshop site. Valid until 2026-10-31.

EXPECTED QUANTITIES

60 m2 floor consumes 6 hours of cutter time and 60 m2 of delivery allocation.

Labour price offer

Rowan Crew - invented supplier

FICTIONAL TRAINING DOCUMENT - NO COMMERCIAL OR LEGAL EFFECT

DEMO / 02-LABOUR-OFFER

Example date: 15 September 2026

RATE

General finishing crew member: 25.00 EUR/hour. Price Set ASTER-26, observation
2026-09-15, Workshop site.

EXAMPLE CONSUMPTION

Floor: 0.40 crew hours per output m2, one resource.
Painting: 0.20 crew hours per output m2, one resource.
Total for 60 m2 floor and 120 m2 paint: 48.00 hours.

COMMERCIAL NOTE

The hourly amount is the assumed teaching cost. Payroll taxes and employment terms are
outside this fictional example. Valid until 2026-10-31.

Material price offer

Juniper Supply - invented supplier

FICTIONAL TRAINING DOCUMENT - NO COMMERCIAL OR LEGAL EFFECT

DEMO / 01-MATERIAL-OFFER

Example date: 15 September 2026

SCOPE

Aster Workshop renovation. Price Set ASTER-26. Delivery location: Workshop site, Example Town. Currency EUR. No tax calculation is represented.

OFFERED RESOURCES

MAT.01 | Floor panels | m2 | September price 18.00 EUR.

MAT.02 | Interior paint | litre | September price 6.00 EUR.

The earlier July observation for floor panels is 16.00 EUR/m2.

The separate ALT-26 floor-panel observation is 20.00 EUR/m2; it must not enter ASTER-26 pricing.

DELIVERY

Material prices exclude delivery. The separate transport resource is 2.00 EUR per installed floor m2. Do not add it when another quotation already includes transport.

VALIDITY

Teaching offer date: 2026-09-15. Valid until 2026-10-31. This is a fictional offer, not a price recommendation.

Material price offer

Juniper Supply - invented supplier

FICTIONAL TRAINING DOCUMENT - NO COMMERCIAL OR LEGAL EFFECT

DEMO / 01-MATERIAL-OFFER

Example date: 15 September 2026

COMMERCIAL NOTES

This second page demonstrates page selection and reusable evidence.
The tutorial links to this source PDF once and can reference page 2 from another item without duplicating the full document.

ASSUMPTIONS

Floor installation consumption is 1.05 m2 of panels per 1 m2 of finished output.
Paint consumption is 0.20 litres per 1 m2 of painted output.
These assumptions exist only to demonstrate the app. No specification or construction instruction is implied.

Inspection report example

Synthetic completion record

FICTIONAL TRAINING DOCUMENT - NO COMMERCIAL OR LEGAL EFFECT

DEMO / 09-INSPECTION-REPORT

Example date: 15 September 2026

REVIEW SUMMARY

Teaching scope: 60 m2 floor and 120 m2 decorated surfaces.

No inspection occurred. The quantities are the same as the fictional BOQ.

WORKFLOW FIELDS

Status: Completed. Percentage Complete: 100.

Document Type: Inspection Report. Date: 2026-09-20.

The example demonstrates how completed items differ from partially complete and blocked items.

NOTES

Record findings in item Notes. Container item status does not change the linked Catalog record.